

Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de e-mail: info@ampri.de

# **Technical Data Sheet**


**4M**Pri

Article-No.: 01183

Description: STYLE BLUEBERRY

Nitrile examination glove

dark-blue, non sterile, powder free





| PRODUCT DESCRIP  | TION  |  |   |   |  |                             |  |
|--|---|--|---|---|--|-----------------------------|--|
| material   | ☐ Latex   | ✓ Nitrile  | ☐ Vinyl   | ☐ Vinyl-Nitrile-<br>mixture               | Polyethy-lene (PE)   | ☐ TPE                       | □ cotton                               |
| colour   | ☐ white   | ☐ blue   | □ black   | ☐ mint                                    | ☐ purple   | ☐ mix                       | ☑ dark-blue                            |
| characteristics  | prepowdered   | powderfree   | ☐ sterile   | non sterile                               | ambidex-   | fits hand-                  | ☐ biodgra-                             |
|  |   |  |   |   | trous  | specific                    | dable                                  |
| surface  | full textured   | ☑ finger<br>textured   | □ not textured  | ☐ embossed                                | chlorinated ins  | side                        |  |
| SIZES  |   |  |   |   |  |                             |  |
|  | XS (5-6)  | S (6-7)  | M (7-8)   | L (8-9)                                   | XL (9-10)  | XXL (10-11)                 | XXXL (11-12)                           |
| width  | ≤ 80 mm   | 80 ± 10 mm   | 95 ± 10 mm  | 110 ± 10 mm                               | 115 ± 10 mm  | -                           | -                                      |
| length   | ≥ 240 mm  | ≥ 240 mm   | ≥ 240 mm  | ≥ 240 mm                                  | ≥ 240 mm   | -                           | -                                      |
| REGULATORY AFFA  | IDC   |  |   | 1   |  |                             |  |
|  |   |  |   | DDF :: 1                                  |  |                             |  |
| PPE-Regulation   | ☐ Category I  | ☐ Category II  |   | ☐ no PPE-article                          | 1  |                             |  |
| (EU) 2016/425  |   |  |   |   |  |                             | CE                                     |
| MD-Regulation  | ☑ Class I   | ☐ Class II a   | ☐ Class III   |   | □ measuring  | ☐ no medical                |  |
| (EU) 2017/745  |   |  |   |   | function   | device                      |  |
| Food Contact   | ☑ acidic foods  | ☑ aqueous  |   | ☑ alcoholic                               | ☑ dry foods  | □ not approved              | ניור דו                                |
| (EG) 1935/2004   |   | foods  |   | foods                                     |  | for food-                   | 501                                    |
|  |   |  |   |   |  | contact                     |  |
| STANDARDISATION  |   |  |   |   |  |                             |  |
| EN 388 Mechanical  | abrasion  | blade cut  | tear resistance   | puncture                                  | blade cut  | impact test                 |  |
| Risks  | resistance  | resistance   | tear resistance   | resistance                                | resistance   | impact test                 |  |
| RISKS  | resistance  |  |   | resistance                                |  |                             |  |
|  |   | Course Tost  |   |   |  |                             |  |
| Level  | not applicable  | Coupe-Test   |   |   | TDM-Test   |                             |  |
| Level  | not applicable  | Coupe-Test   | code letter   | level                                     | permeation time  | degradation                 | <u> </u>                               |
| EN 374-1   |   | •  | code letter   | level 6                                   |  | degradation                 | ISO 374-1/Type B                       |
|  | chemical  | 40%  |   |   | permeation time  |                             | ISO 374-1/Type B                       |
| EN 374-1<br>Chemical Risks   | chemical<br>Sodium hydroxide<br>Hydrogen Peroxide   | 40%  | K   | 6   | permeation time > 480 min  | 15,1 %                      | ISO 374-1/Type B                       |
| EN 374-1<br>Chemical Risks<br>EN 374-4   | chemical<br>Sodium hydroxide  | 40%  | K<br>P  | 6 2                                       | permeation time > 480 min > 30 min   | 15,1 %<br>-74,7 %           | ISO 374-1/Type B                       |
| EN 374-1<br>Chemical Risks   | chemical<br>Sodium hydroxide<br>Hydrogen Peroxide   | 40%  | K<br>P  | 6 2                                       | permeation time > 480 min > 30 min   | 15,1 %<br>-74,7 %           | ISO 374-1/Type B                       |
| EN 374-1<br>Chemical Risks<br>EN 374-4   | chemical<br>Sodium hydroxide<br>Hydrogen Peroxide   | 40%  | K<br>P  | 6 2                                       | permeation time > 480 min > 30 min   | 15,1 %<br>-74,7 %           | ISO 374-1/Type B                       |
| EN 374-1<br>Chemical Risks<br>EN 374-4   | chemical<br>Sodium hydroxide<br>Hydrogen Peroxide<br>Formaldehyde 37%   | 40%<br>2 30%<br>6  | K<br>P<br>T   | 6 2 5                                     | permeation time > 480 min > 30 min   | 15,1 %<br>-74,7 %<br>24,0 % | KPT 88 150 274-5-2016                  |
| EN 374-1<br>Chemical Risks<br>EN 374-4<br>Degradation<br>EN 374-5  | chemical<br>Sodium hydroxide<br>Hydrogen Peroxide<br>Formaldehyde 37%   | 40%<br>2 30%<br>6  | K<br>P<br>T   | 6 2 5                                     | permeation time  | 15,1 %<br>-74,7 %<br>24,0 % | KPT 8N 150 374-3-2016                  |
| EN 374-1<br>Chemical Risks<br>EN 374-4<br>Degradation<br>EN 374-5<br>microorganism   | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a   | 40%<br>e 30%<br>6  | K<br>P<br>T   | 6<br>2<br>5<br>5<br>and fungi). Test acco | permeation time  | 15,1 %<br>-74,7 %<br>24,0 % | KPT 88 150 274-5-2016                  |
| EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves   | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a   | 40% 2 30% 6 gainst microorganis  | K P T sms (viral, bacteria a  | 6 2 5 5 and fungi). Test acco             | permeation time  | 15,1 %<br>-74,7 %<br>24,0 % | KPT 88 150 274-5-2016                  |
| EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455  | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a   | 40% 2 30% 6 gainst microorganis  | K P T sms (viral, bacteria a  | 6<br>2<br>5<br>5<br>and fungi). Test acco | permeation time  | 15,1 %<br>-74,7 %<br>24,0 % | KPT EN 150 378-5-2016 VIRUS            |
| EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for                       | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a   | 40% 2 30% 6 gainst microorganis  | K P T sms (viral, bacteria a  | 6 2 5 5 and fungi). Test acco             | permeation time  | 15,1 %<br>-74,7 %<br>24,0 % | KPT  BN 150 374-5-2016  VIRUS          |
| EN 374-1 Chemical Risks EN 374-4 Degradation  EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use           | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th                      | 40% 2 30% 6 gainst microorganis ne requirements accorde requirements accorder  | K P T  sms (viral, bacteria according to EN ISO 2ccording to EN 455-1 | 6<br>2<br>5<br>and fungi). Test acco      | permeation time   > 480 min   > 30 min   > 240 min   > 240 min     > 240 min   > 240 min   > 240 min     > 240 min   > 240 min     > 240 min     > 240 min     > 240 min     > 240 min | 15,1 %<br>-74,7 %<br>24,0 % | KPT EN 150 378-5-2016 VIRUS            |
| EN 374-1 Chemical Risks EN 374-4 Degradation  EN 374-5 microorganism tightness  EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a  The glove meets th  The glove meets th | 40% 2 30% 6 gainst microorganis ne requirements accorder requireme | K P T  sms (viral, bacteria according to EN ISO 2ccording to EN 455-1 | 6<br>2<br>5<br>and fungi). Test acco      | permeation time  | 15,1 %<br>-74,7 %<br>24,0 % | KPT  KPT  KPT  KPT  KPT  KPT  KPT  KPT |
| EN 374-1 Chemical Risks EN 374-4 Degradation  EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use           | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th                      | 40% 2 30% 6 gainst microorganis ne requirements accorder requireme | K P T  sms (viral, bacteria according to EN ISO 2ccording to EN 455-1 | 6<br>2<br>5<br>and fungi). Test acco      | permeation time   > 480 min   > 30 min   > 240 min   > 240 min     > 240 min   > 240 min   > 240 min     > 240 min   > 240 min     > 240 min     > 240 min     > 240 min     > 240 min | 15,1 %<br>-74,7 %<br>24,0 % | KPT  EN 1502 DAS-52016  EN 455         |
| EN 374-1 Chemical Risks EN 374-4 Degradation  EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1  | chemical Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a  The glove meets th  The glove meets th | 40% 2 30% 6 gainst microorganis ne requirements accorder requireme | K P T  sms (viral, bacteria according to EN ISO 2ccording to EN 455-1 | 6<br>2<br>5<br>and fungi). Test acco      | permeation time   > 480 min   > 30 min   > 240 min   > 240 min     > 240 min   > 240 min   > 240 min     > 240 min   > 240 min     > 240 min     > 240 min     > 240 min     > 240 min | 15,1 %<br>-74,7 %<br>24,0 % | KPT  KPT  KPT  KPT  KPT  KPT  KPT  KPT |



21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de


## **Technical Data Sheet**

Article-No.: 01183

Description: STYLE BLUEBERRY

Nitrile examination glove

dark-blue, non sterile, powder free

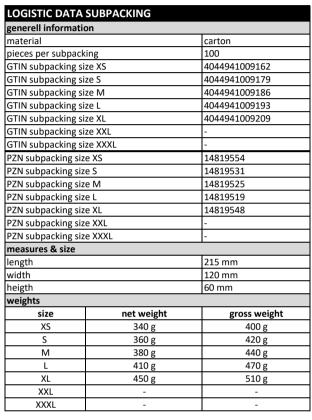

| LOGISTIC DATA PALETTE |            |              |  |  |  |  |
|-----------------------|------------|--------------|--|--|--|--|
| general information   | n          |              |  |  |  |  |
| kind of palett        |            | euro-palette |  |  |  |  |
| measures & size       |            |              |  |  |  |  |
| cartons per layer     |            | 10           |  |  |  |  |
| layers per palette    |            | 8            |  |  |  |  |
| heigth of the palett  | e          | 199 cm       |  |  |  |  |
| weights               |            |              |  |  |  |  |
| size                  | net weight | gross weight |  |  |  |  |
| XS                    | 360 g      | 385 g        |  |  |  |  |
| S 376 g               |            | 401 g        |  |  |  |  |
| M                     | 392 g      | 417 g        |  |  |  |  |
| L                     | 416 g      | 441 g        |  |  |  |  |
| XL                    | 448 g      | 473 g        |  |  |  |  |
| XXL                   | -          | -            |  |  |  |  |
| XXXI                  | -          | -            |  |  |  |  |



| LOGISTIC DATA (     |               |              |  |
|---------------------|---------------|--------------|--|
| material            | carton        |              |  |
| subpackings per out | 10            |              |  |
| GTIN outer packing  | 4044941009216 |              |  |
| GTIN outer packing  | 4044941009223 |              |  |
| GTIN outer packing  | 4044941009230 |              |  |
| GTIN outer packing  | 4044941009247 |              |  |
| GTIN outer packing  | 4044941009254 |              |  |
| GTIN outer packing  | -             |              |  |
| GTIN outer packing  |               | -            |  |
| PZN outer packing s | -             |              |  |
| PZN outer packing s | ize S         | -            |  |
| PZN outer packing s | -             |              |  |
| PZN outer packing s | -             |              |  |
| PZN outer packing s | -             |              |  |
| PZN outer packing s | -             |              |  |
| PZN outer packing s | -             |              |  |
| measures & size     |               |              |  |
| length              | 315 mm        |              |  |
| width               | 255 mm        |              |  |
| heigth              |               | 230 mm       |  |
| weights             |               |              |  |
| size                | net weight    | gross weight |  |
| XS                  | 4.000 g       | 4.500 g      |  |
| S                   | 4.200 g       | 4.700 g      |  |
| M                   | 4.400 g       | 4.900 g      |  |
| L                   | 4.700 g       | 5.200 g      |  |
| XL                  | 5.100 g       | 5.600 g      |  |
| XXL                 | -             | -            |  |
| XXXL -              |               | <u>-</u>     |  |



# AMPri Handelsgesellschaft mbH

Benzstraße 16

21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de

# **Technical Data Sheet**

Article-No.: 01183

Description: STYLE BLUEBERRY

Nitrile examination glove

dark-blue, non sterile, powder free



## WARNINGS AND SAFETY INFORMATION

| storage / | expiry |
|-----------|--------|
| date      |        |

Store gloves in original packaging in a cool and dry place without additional weight, protect from direct sunlight. Do not store near ozone sources (laser printers, copiers). The actual expiry time in use cannot be specified in general terms, as it depends on the general conditions of use. An individual risk assessment must be carried out in each case. The expiry date - valid for proper storage - is stated on the packaging.

#### use and control

Always use protective gloves only for the intended use and in the correct size. A check/risk assessment must be carried out to ensure that the gloves are suitable for the intended use, as the conditions at the workplace may deviate from those of the type test depending on temperature, abrasion and degradation. Breakthrough times and permeation levels are based on laboratory measurements and are determined using samples taken from the palm of the hand. The actual duration of protection of a glove with a specific substance can vary significantly due to the conditions of use (temperature, abrasion, stretching). In the case of aggressive chemicals, degradation (change in mechanical properties) can be an important factor to consider when selecting chemical-resistant gloves. This information does not reflect the actual duration of protection in the workplace and the distinction between mixtures and pure chemicals. The chemical resistance was determined under laboratory conditions only on the basis of samples from the palm and refers only to the chemicals tested. The situation may be different if the chemical is used in a mixture. The penetration resistance was evaluated under laboratory conditions and refers only to the tested specimen. The degradation results according to EN ISO 374-4 show the change in puncture resistance of the gloves after exposure to the tested chemical.

Before use, the gloves must be checked for holes or damage.

### disposal

Used gloves must be disposed of in accordance with the disposal regulations of the local waste disposal company. Unused gloves can be disposed of with household waste.

## disinfection

Disinfection is not intended for these gloves and is the responsibility of the user.

## warnings/ allergy information

Protective gloves are intended for single use only.

This product contains dithiocarbamates, which may cause allergic reactions

# donning and doffing instructions











rev-no.:

date 24.09.2024

changes and errors excepted